SOCKET MOBILE S740

Follow the steps outlined below to configure and pair your socket mobile scanner with RICS>mPOS.

1. Scan the barcode below to put the scanner in pairing mode

*Configures scanner to work with an application.

#FNB00F40002#
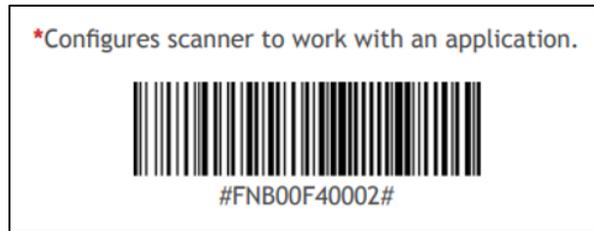
2. Navigate to the settings section on the tablet

   Note: This is the settings for the tablet, not the POS application.

3. Select Bluetooth

4. Select the socket device from the list of 'Other Devices' (Note: Once the Socket device appears in the 'My Device' section as 'Connected', the scanner is paired with the tablet.)

5. Open the mPOS application

6. After a few seconds the scanner will beep, indicating it is paired with the application